

加壓式密煉機 Pressurized Kneader

密煉機特性:


1. 本機裝置全自動溫度及時間控制系統, 操作精準、簡單容易, 混煉可達成最佳之分散及均勻效果。
2. 混合槽為可傾倒式, 攪拌軸防漏採用干式機械軸封使清洗換色簡便容易。
3. 加壓密封式混合槽除可確保混合物品質外并可防止環境污染。
4. 混合槽採用高級合金鋼製造, 表面皆經耐磨鋼處理, 表面電鍍硬鉻耐磨性特佳。

Character:

1. This equipment possesses temperature and time control system for easy but accurate operation and best decentralization.
2. Tilt-able mixing chamber and mechanical shaft sealing design for easy cleaning and colour changing.
3. Pressure sealed mixing chamber to assure the quality of mixed material and also prevent environment pollution.
4. The mixing chamber is made of sould alloy steel and the work surface is hare chromim coated for supper anti-abrasion.



加壓式密煉機 Pressurized Kneader

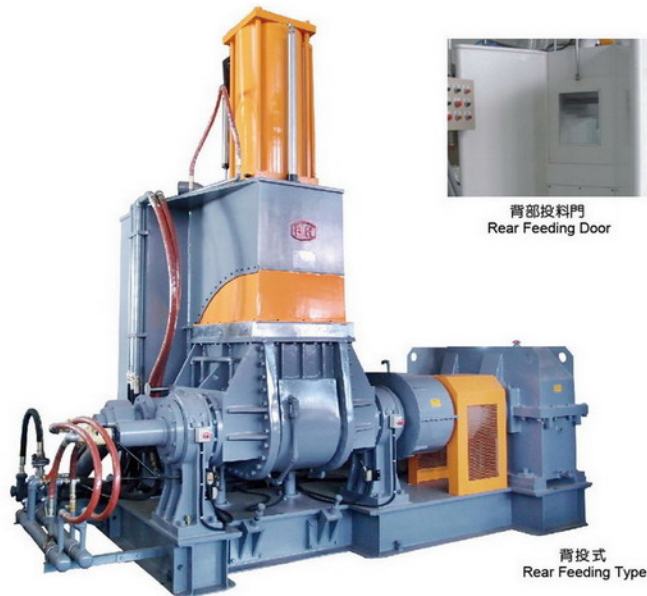

混合密煉容積(公升)	Mixing chamber volume	10L	20L	35L	55L	75L	110L	150L
主電機功率(KW)	Main motor power	22KW	37KW	55KW	75KW	110KW	160KW	220KW
氣缸直徑(mm)	Diameter of cylinder	Φ 160	Φ 200	Φ 250	Φ 300	Φ 350	Φ 420	Φ 500
投料方式(前/背)	Feed mode (F/R)	前投式(F)	前投式(F)	前/背投式(F/B)	前/背投式(F/B)	前/背投式(F/B)	前/背投式(F/B)	前/背投式(F/B)
機械重量(KG)	Equipment weight	2300	4200	6500	8500	10600	14000	20000
安裝尺寸(mm)	Install dimension	2150x1350x2200	2350x1550x2400	2570x2180x2570	3370x2460x3180	3650x2560x3220	4245x2850x3380	4580x3200x4100